warmcore® SV

SLIM VENT WINDOW ENQUIRY/ORDER FORM V1

Phone 01733 230883
Email sales@clearviewglaziers.co.uk
Web www.clearviewglaziers.co.uk

Company: .....

Account No. .....

Address: .....

.....

..... Postcode: .....

Tel: .....

Fax: .....

Contact Name: .....

Email: .....

Requested Delivery Date: .....

Order Reference: .....

Signature: .....

Page ☐ of ☐

Quote ☐

Order ☐

If windows are multi-light with 1 or more openers, only fixed lights will need to be dummy sashes. This is due to hardware constraint.

FRAME COLOUR

External: ☐ White ☐ Grey (7016)

Internal: ☐ White ☐ Grey (7016)

GLAZING OPTIONS

☐ Standard double glazed - 28mm
Soft Coat/Argon/Warm Edge/Clear (1.2 W/m²K U-value centre pane)

☐ Celsius double glazed - 28mm
Soft Coat/Argon/Warm Edge/Clear (1.1 W/m²K U-value centre pane)

☐ Triple glazed - 44mm
2x Soft Coat/Argon/Warm Edge/Clear (0.6 W/m²K U-value centre pane)

☐ **Add Laminated Glass for your Secured by Design Upgrade**

EXTERNAL STYLING

☐ Squared

HANDLE

☐ Chrome

☐ White

GLAZING BEAD

☐ Squared/Squared
4 Sides

CASEMENT OPTIONS

Trickle vents are only available on 'standard' frame - not flush.
It is only possible to have a trickle vent through an add-on to the head.
If you request a trickle vent, an add-on will automatically be included.

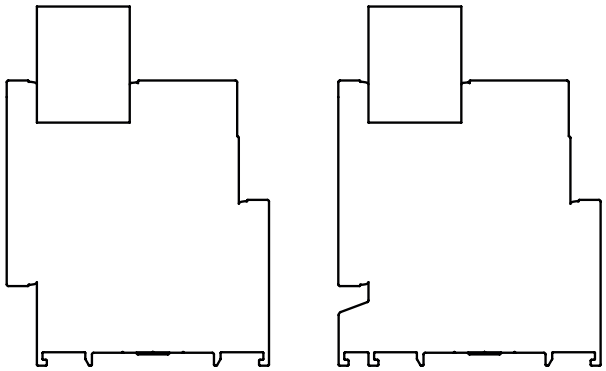

☐ Standard ☐ Flush

WINDOW DESIGN (VIEWED EXTERNALLY)

Width: Height:

Transom position: Mullion position:

Fire Escape: ☐ T/Vents through Add-On: ☐ Obscure: ☐

Frame Size: 50mm ☐ 60mm ☐ Add Ons: ☐ 20mm Coupler: ☐

Please denote if toughened glass is required by placing "T" in the appropriate location

Sill: None ☐ 85mm ☐ 150mm ☐ 180mm ☐ 225mm ☐

Additional Information:

warmcore® SV

SLIM VENT WINDOW ENQUIRY/ORDER FORM V1

CLEARVIEW GLAZIERS

Phone 01733 230883
Email sales@clearviewglaziers.co.uk
Web www.clearviewglaziers.co.uk

Page ____ of ____ Quote ____ Order ____

WINDOW DESIGN (VIEWED EXTERNALLY)

Width: Height:

Transom position: Mullion position:

Fire Escape: ☐ T/Vents through Add-On: ☐ Obscure: ☐

Frame Size: 50mm ☐ 60mm ☐ Add Ons: ☐ 20mm Coupler: ☐

Please denote if toughened glass is required by placing "T" in the appropriate location

Sill: None ☐ 85mm ☐ 150mm ☐ 180mm ☐ 225mm ☐

Additional Information:

WINDOW DESIGN (VIEWED EXTERNALLY)

Width: Height:

Transom position: Mullion position:

Fire Escape: ☐ T/Vents through Add-On: ☐ Obscure: ☐

Frame Size: 50mm ☐ 60mm ☐ Add Ons: ☐ 20mm Coupler: ☐

Please denote if toughened glass is required by placing "T" in the appropriate location

Sill: None ☐ 85mm ☐ 150mm ☐ 180mm ☐ 225mm ☐

Additional Information:

WINDOW DESIGN (VIEWED EXTERNALLY)

Width: Height:

Transom position: Mullion position:

Fire Escape: ☐ T/Vents through Add-On: ☐ Obscure: ☐

Frame Size: 50mm ☐ 60mm ☐ Add Ons: ☐ 20mm Coupler: ☐

Please denote if toughened glass is required by placing "T" in the appropriate location

Sill: None ☐ 85mm ☐ 150mm ☐ 180mm ☐ 225mm ☐

Additional Information:

WINDOW DESIGN (VIEWED EXTERNALLY)

Width: Height:

Transom position: Mullion position:

Fire Escape: ☐ T/Vents through Add-On: ☐ Obscure: ☐

Frame Size: 50mm ☐ 60mm ☐ Add Ons: ☐ 20mm Coupler: ☐

Please denote if toughened glass is required by placing "T" in the appropriate location

Sill: None ☐ 85mm ☐ 150mm ☐ 180mm ☐ 225mm ☐

Additional Information: